




MFG **T**

Shenzhen Megmeet Electrical Co., Ltd.(Stock Code:002851) is a one-stop solution provider for the R&D, electronics and automatic control echnology. Company's main business covers six parts: power supply products, industrial automation, new energy vehicle& rail transit, intelligent equipment, smart appliance electronic control and precision connection.

Our company has established a strong platform of R&D, manufacturing, marketing and service with more than 2800 R&D personnel and a total of more than 7800 employees. We have established R&D centers in Shenzhen City, Changsha City, Xi'an City, Wuhan City, Zhuzhou City, Hangzhou City, Taizhou City and Chengdu City; overseas research institutes in the United States, Germany, and Sweden; manufacturing centers in Zhuzhou City, Dongguan City, Heyuan City, Taizhou City, and Yiwu City; overseas factories in Thailand and India; overseas marketing station in the United States, Japan, Korea, Southeast Asia, India, Germany, Poland, Romania, Turkey, Sweden to provide quality service resources.

control and energy saving.

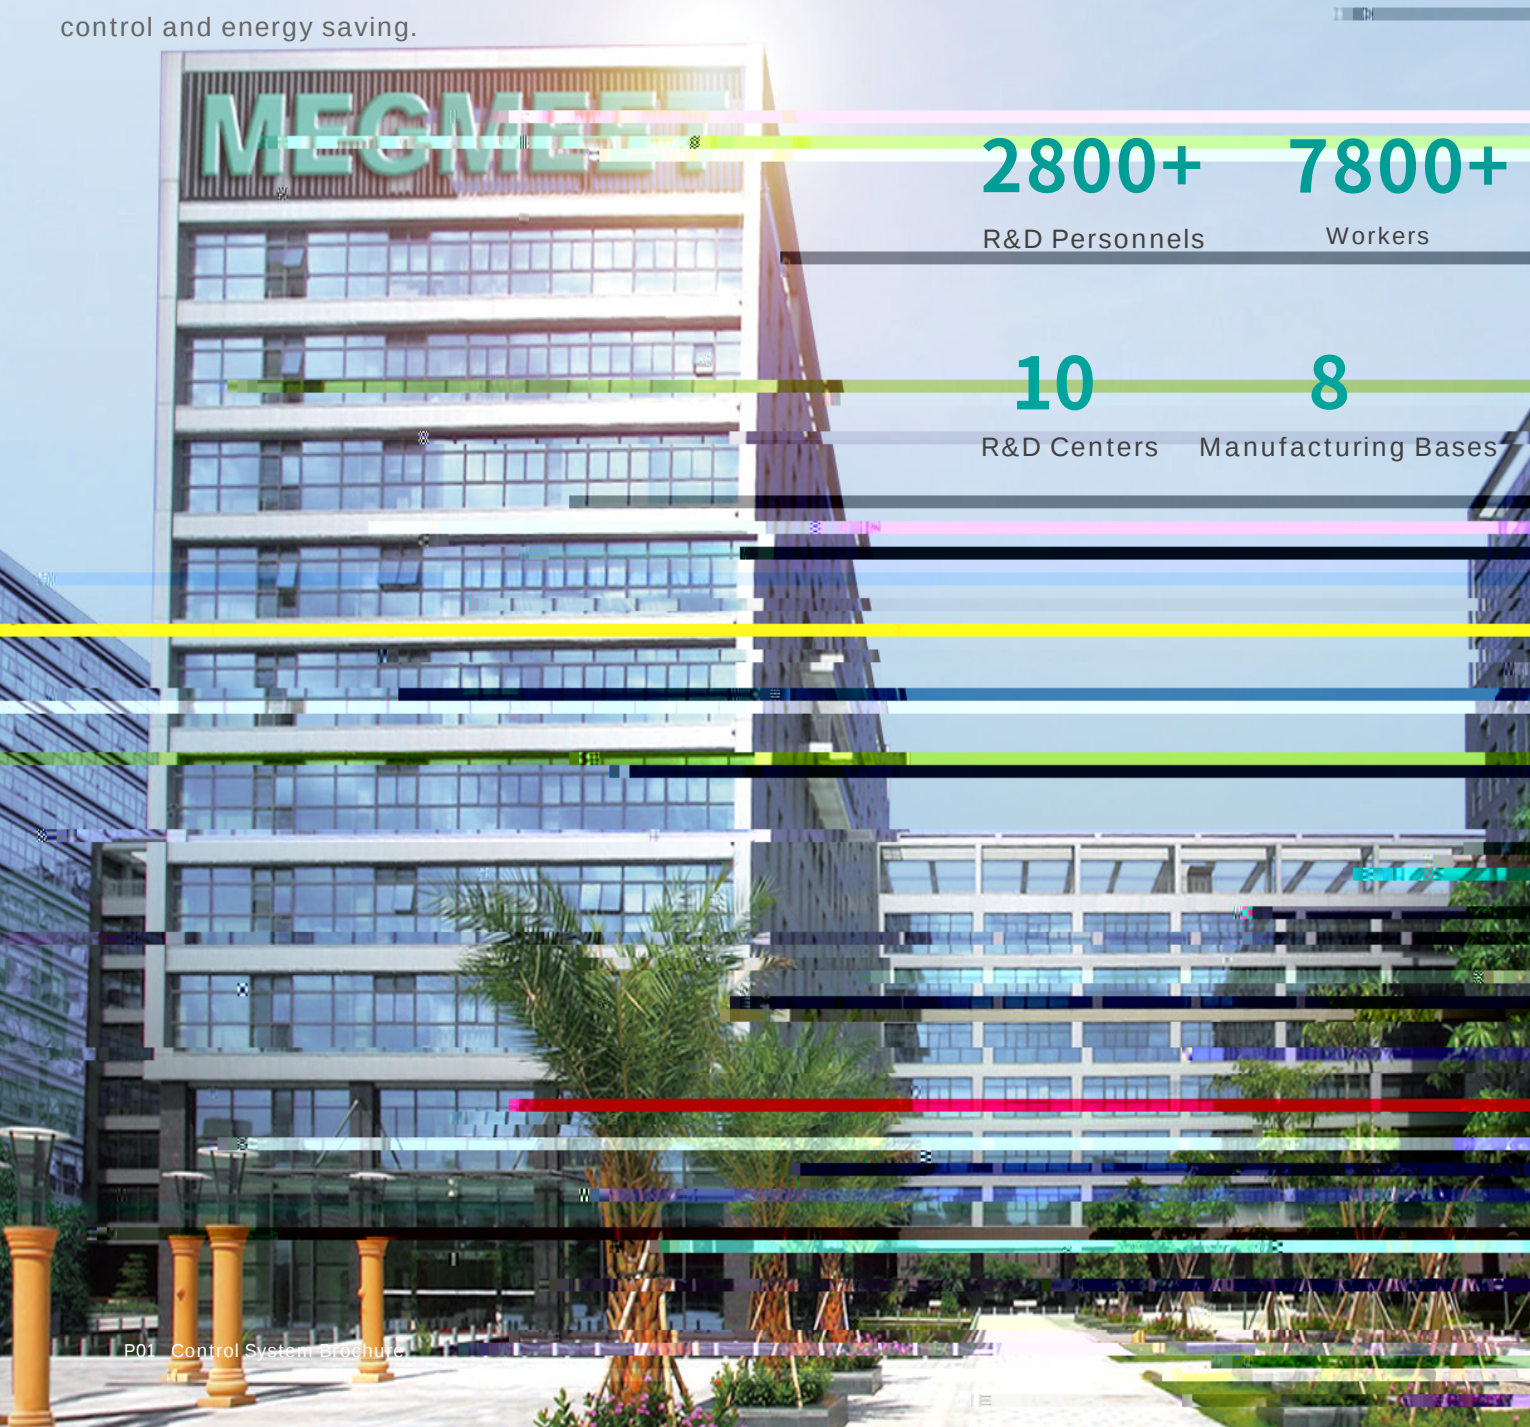

Contents

Medium PLC

03/07	KV4 . . Qcpgcq KA6 . . . Qcpgcq KA4 . . . Qcpgcq KA3 . . . Qcpgcq
-------	--

Small PLC

08/18	KS2 . . Qcpgcq KS1 . . Qcpgcq KS0 . . Qcpgcq KA5 . . Qcpgcq KA06 . -KA0 . . C Qcpgcq KA0 . . Qcpgcq KA/ . . Qcpgcq
-------	--

Remote I/O Module

19/20	KP2 . . Qcpgcq KA3 . . . Q Qcpgcq
-------	--------------------------------------

Temperature Controller

21/26	KOR Qcpgcq KRA-KRAU-KRAT Qcpgcq KRAC Qcpgcq KA?Q Qcpgcq KBR Qcpgcq
-------	--

Cable List


27	A_`jc Jgqr
----	------------

HMI

29/30	KX6 . . Qcpgcq
-------	----------------

MC8000 Series Medium PLC *

MC8000 series product is a new generation of high-performance and cost-effective medium PLC based on the mOPAX platform of MEGMEET. It is fully compatible with the IEC61131-3 programming specification and supports LD, ST, SFC, CFC, FBD, and IL programming languages; adopts the blade-type module design, and supports multi-core processor. Based on multi-bus protocols such as EtherCAT and Profinet, a multi-axis motion control system is constructed, to meet the high-speed response requirements of intelligent devices.

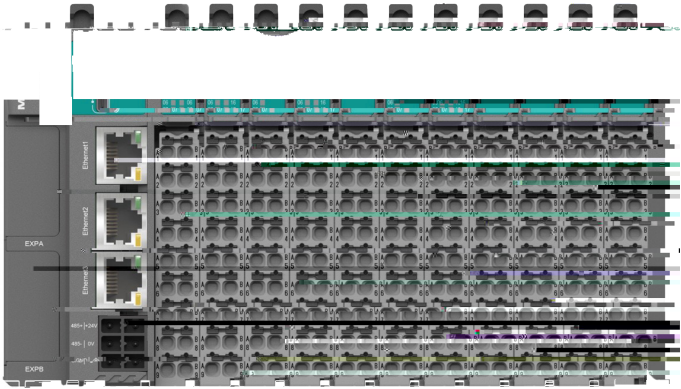

*Developing
Coming soon

Product Feature

Qrpmle cvn_l qgm l \$ l crumpig le

- Expand up to 32 modules, support the expansion of digital, analog, CAN, RS485, RS232, etc.
- Full protocol compatibility, support Modbus/ EtherCAT/EtherNet IP/Profinet and others.

Pcjg_`jw cvacjjc l r ncpdmp k _l ac

- Four-core A55 processor, communication, logic and algorithm are completely independent.
- 8*200K high-speed input, 8*200K pulse output (single pulse, pulse + direction, AB phase, FWD+REV, etc.)

Npcagqc Ksjrg+_vgq am l rpmj



- 1ms/16-axis sync, support 16/32/64-axis EtherCAT control

Djcvq`jc \$ am l tc lgc l r mn cp_rgm l

- 12mm machine body, saving space
- PUSH In terminal, easily wiring and replacing without tools

Sjrp_+j_pec a _n_agrw

- Support 10M program capacity, 20M data capacity, 512KB retention, for complex logic and data processing

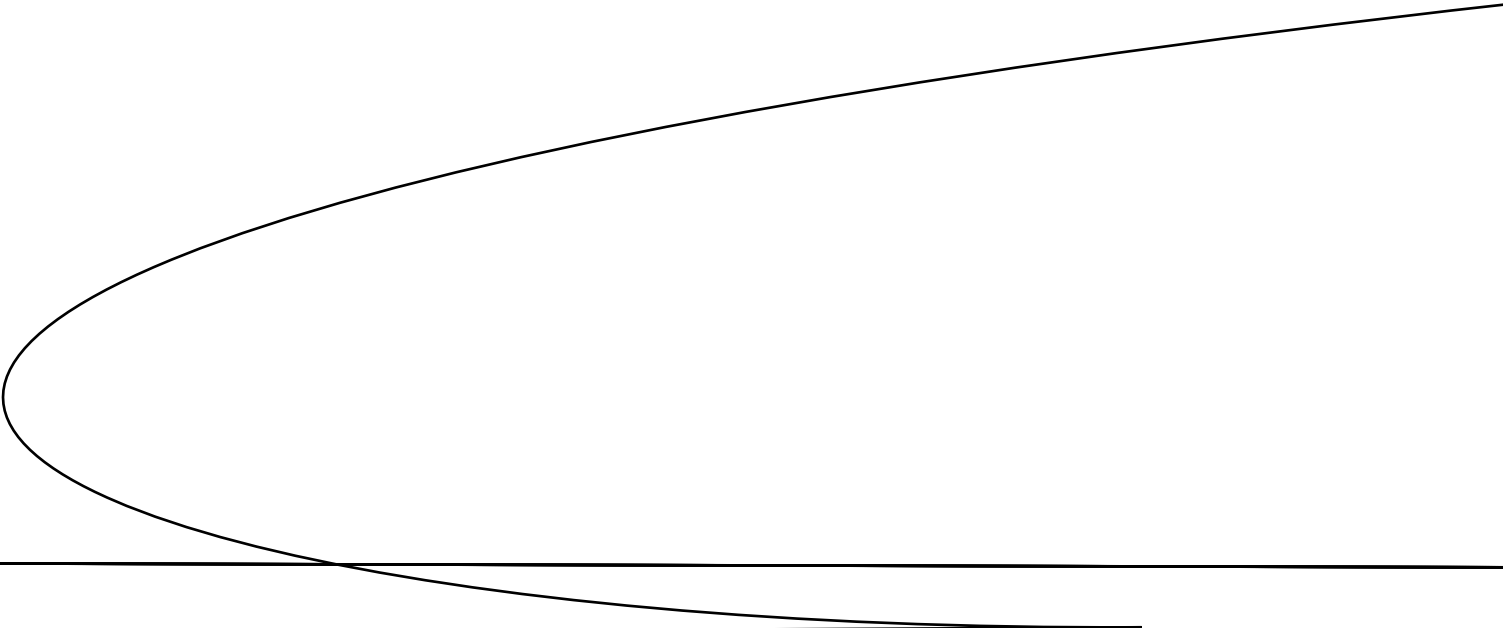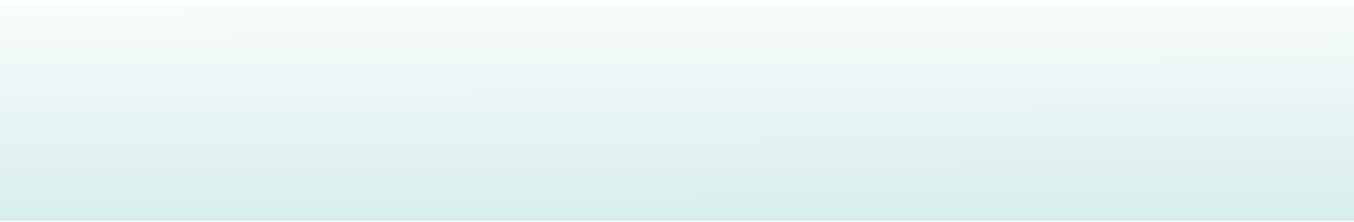

Model		Description		Speci cation	
		CPU Module			
		IO of Main Module		Number of bus control axis	
MC5200E	Input: 16-channel	-		Standard medium module	
	Output: 16-channel transistor				
MC5100EA	Input: 4-channel 200K pulse 3-channel 1M differential pulse	-		Pulse main module	
	Output: 4-channel transistor, 6×2M differential pulse channel				
MC5101EB	Input:8-channel(support 4-channel 200K pulse)	-		Pulse main module	
	Output:8-channel transistor(support 4-channel 200K pulse)				
MC5000E8	Input: 16-channel	8-axis EtherCAT		Bus main module	
	Output: 16-channel transistor				
MC5000E16	Input: 16-channel	16-axis EtherCAT		Bus main module	
	Output: 16-channel transistor				
MC5000E32	Input: 16-channel	32-axis EtherCAT		Bus main module	
	Output: 16-channel transistor				
MC5000E64	Input: 16-channel	64-axis EtherCAT		Bus main module	
	Output: 16-channel transistor				
MC5001EB8	Input:8-channel(support 4-channel 200K pulse)	8-axis EtherCAT		Bus main module	
	Output:8-channel transistor(support 4-channel 200K pulse)				
MC5001EB16	Input:8-channel(support 4-channel 200K pulse)	16-axis EtherCAT		Bus main module	
	Output:8-channel transistor(support 4-channel 200K pulse)				
MC5001EB32	Input:8-channel(support 4-channel 200K pulse)	32-axis EtherCAT		Bus main module	
	Output:8-channel transistor(support 4-channel 200K pulse)				
MC5001EB64	Input:8-channel(support 4-channel 200K pulse)	64-axis EtherCAT		Bus main module	
	Output:8-channel transistor(support 4-channel 200K pulse)				
MC5000EA8	Input: 4-channel 200K pulse 3-channel 1M differential pulse	8-axis EtherCAT		Bus main module	
	Output: 4-channel transistor, 6×2M differential pulse channel				
MC5000EA16	Input: 4-channel 200K pulse 3-channel 1M differential pulse	16-axis EtherCAT		Bus main module	
	Output: 4-channel transistor, 6×2M differential pulse channel				

Applicable to MC6000/MC5000 basic modules and MC5000S remote IO modules

Power Module		
MP50AC220	Input: 100~240Vac, Output: 24V/2A	AC power module
IO Expansion Module		
MC5000-3232ETN	32-point 24DVC input, 32-point transistor output	Cluster terminal
MC5000-1616ETN	16-point 24DVC input, 16-point transistor output	Cluster terminal
MC5000-3200ENN	32-point 24DVC input	Cluster terminal
MC5000-0032ETN	32-point transistor output	Cluster terminal
MC5000-6400ENN	64-point 24DVC input	Cluster terminal
MC5000-0064ETN	64-point transistor output	Cluster terminal
MC5000-1600ENN-T	16-point 24DVC input	Plug-pull screw terminal
MC5000-0016ERN-T	16-point relay output	Plug-pull screw terminal
MC5000-0016ETN-T	16-point transistor output	Plug-pull screw terminal
MC5000-3200ENN-P	32-point IO input	Euroblock
MC5000-0032ETN-P	32-point IO output	Euroblock
MC5000-1616ETN-PH	16-point 24DVC input, 16-point transistor output (with 4 channels high-speed counter)	Euroblock
MC5000-1600ENN-P	16-point IO input	Euroblock
MC5000-0016ETN-P	16-point IO output	Euroblock
MC5000-0016ERN-P	16-point relay output	Euroblock
MC5000-0014EPN-P	14-point high-side transistor output	Euroblock
Special Function Module		
MC5000-8PO	8-axis 200KHZ pulse output module (1 main module can con gure up to 4, MC5000 only)	Cluster terminal
MC5000-4AD/8AD	4/8-channel analog quantity input module	Plug-pull screw terminal
MC5000-4DA	4-channel analog quantity output module	Plug-pull screw terminal
MC5000-4PT	4-channel thermal resistance temperature module	Plug-pull screw terminal
MC5000-4TC/8TC	4/8-channel thermocouple temperature module	Plug-pull screw terminal
MC5000-2WT*	2-channel weighing module	Plug-pull screw terminal
MC5000-4DA-P	4-channel analog quantity output module	Euroblock
MC5000-6AD-P	6-channel analog quantity input module	Euroblock
MC5000-8TC-P	8-channel thermocouple temperature module	Euroblock
Remote IO Module		
MC5000S-ET	EtherCAT expansion rack	EtherCAT slave station
MC5000S-EIP	EtherNet/IP expansion rack	EtherNet/IP slave station
MC5000S-PN	Pro Net expansion rack	Pro Net slave station
Accessory		
MCA05-100L	1m terminal line	Tieline
MCA05-150L	1.5m terminal line	Tieline
MCA10-40P	40PIN terminal	Wiring terminal

MU300 Series Small PLC

E-gear and other control function, to achieve high-speed operation and efficient communication, flexible configuration and



Product Feature

Flexible expansion

-
-

EtherCAT Control

- μ
- Communication port: 1*EtherCAT+2*EtherNet,

Excellent performance for precise control

- significantly improved based on ARM+FPGA
- Support 8-channel 200K high-speed pulse output and single-phase pulse count, or 4-channel 100K AB-phase, CW/CCW, pulse+direction
-

Networking based on multi-communication

-
-

Basic Module (AC Power)

Model	Description	Dimensions(mm) LxWxH
MU300-0808BTA16	8-point DC24V input, 8-point transistor output (16 bus axis)	
MU300-0808BTA8	8-point DC24V input, 8-point transistor output (8 bus axis)	
MU300-1210BTA16	12-point DC24V input, 10-point transistor output (16 bus axis)	
MU300-1210BTA8	12-point DC24V input, 10-point transistor output (8 bus axis)	
1P		

MU200 Series Small PLC

MU200 new generation of small PLC uses ARM+FPGA dual-core processor for the powerful processing function,



Product Feature

Networking based on multi-communication

-
-

Flexible expansion

-
-

Excellent performance for precise control

- significantly improved based on ARM+FPGA
- Support up to 12-channel 200K high-speed pulse output
-

Convenient hardware configuration

-
-
-
-
-
-

MC700 Series Motion Controller

Basic Module (AC Power)

Model	Description	Dimensions(mm) LxWxH
MU200-4040BTA	40-point DC24V input, 40-point transistor output	246x90x85
MU200-4040BRA	40-point DC24V input, 40-point relay output	
MU200-3232BTA	32-point DC24V input, 32-point transistor output	210x90x85
MU200-3232BRA	32-point DC24V input, 32-point relay output	
MU200-2424BTA	24-point DC24V input, 24-point transistor output	180x90x85
MU200-2424BRA	24-point DC24V input, 24-point relay output	
MU200-1616BTA	16-point DC24V input, 16-point transistor output	145x90x85
MU200-1616BRA	16-point DC24V input, 16-point relay output	

IO Expansion Module Applicable to the basic modules of MU300/MU200 series PLC

Model	Description	Dimensions(mm) LxWxH
MU200-0016ERN	16-point relay output	60x90x85
MU200-0016ETN	16-point transistor output	
MU200-1600ENN	16-point intput	
MU200-0808ERN	8-point DC24V input, 8-point relay output	
MU200-0808ETN	8-point DC24V input, 8-point transistor output	

Special Function Module Applicable to the basic modules of MU300/MU200 series PLC

Model	Description	Dimensions(mm) LxWxH
MU200-4AD	4-channel analog quantity input	60x90x85
MU200-8AD	8-channel analog quantity input	
MU200-4DA	4-channel analog quantity output	
MU200-8TC	8-channel thermocouple	
MU200-4PT	4-channel thermal resistance	

Expansion Card Applicable to the basic modules of MU300/MU200 series PLC

Model	Description	Dimensions(mm) LxWxH
MUE-4X	4-point input	38x46.4x11.5
MUE-4Y	4-point output	
MUE-4XY	2-point input and 2-point output	
MUE-2AD	2-channel analog quantity input	
MUE-2DA	2-channel analog quantity output	
MUE-2AM	1-channel analog quantity input and 1-channel analog quantity output	
MUE-RS232	RS232 communication	
MUE-RS485	RS485 communication	
MUE-CAN	CAN communication	

MC200 Series Small PLC



Product Feature

High speed and large capacity

- Program capacity: 12K
- Instruction capacity: 100K

High stability and reliability

- Input filter protection and power loss protection
- Self-diagnostic function

Reliable program security

-

Strong expansion capability

- 16-slot expansion capacity
- 16-slot expansion capacity
- 16-slot expansion capacity

Excellent communication networking

- RS-485, CAN, Ethernet, etc.
- RS-485, CAN, Ethernet, etc.
- RS-485, CAN, Ethernet, etc.

Basic Module (AC Power)

Model	Speci cation	Dimensions(mm) LxWxH
MC200-2012BRA	20-point 24VDC input, 12-point relay output	158x90x82
MC200-2012BTA	20-point 24VDC input, 12-point transistor output	
MC200-3232BRA	32-point 24VDC input, 32-point relay output	228x90x82
MC200-3232BTA	32-point 24VDC input, 32-point transistor output	
MC200-4040BRA	40-point 24VDC input, 40-point relay output	275x90x82
MC200-4040BTA	40-point 24VDC input, 40-point transistor output	

IO Expansion Module Applicable to the basic modules of MC280/MC200E/MC200 series PLC

Model	Speci cation	Dimensions(mm) LxWxH
MC200-0800ENN	8-point 24VDC input	58x90x82
MC200-1600ENN	16-point 24VDC input	
MC200-0008ERN	8-point relay output	
MC200-0008ETN	8-point transistor output	
MC200-0808ERN	8-point 24VDC input, 8-point relay output	
MC200-0808ETN	8-point 24VDC input, 8-point transistor output	
MC200-0016ERN	16-point relay output	
MC200-0016ETN	16-point transistor output	
MC200-1616ERN	20-point 24VDC input, 12-point relay output	158x90x82
MC200-1616ETN	16-point 24VDC input, 16-point transistor output(Active)	
MC200-1616ERA	16-point 24VDC input, 16-point relay output(Active)	
MC200-1616ETA	16-point 24VDC input, 16-point transistor output(Active)	

Special Function Module Applicable to the basic modules of MC280/MC200E/MC200 series PLC

Model	Speci cation	Dimensions(mm) LxWxH
MC200-2AD MC200-4AD	2-point, 4-point analog quantity input	58x90x82
MC200-2DA MC200-4DA	2-point, 4-point analog quantity output	
MC200-8AD	8-point analog quantity input	
MC200-4AM	2-point analog quantity input, 2-point analog quantity output	
MC200-5AM	4-point analog quantity input, 1-point analog quantity output	
MC200-2TC MC200-4TC	2-point, 4-point thermocouple	
MC200-8TC	8-point thermocouple	
MC200-2PT MC200-4PT	2-point, 4-point thermal resistance	
MC200-2HC	2-channel high-speed count module: single-phase 200K; bi-directional phase 100K; 1-channel pulse following output 20K	

Communication Module Applicable to the basic modules of MC280/MC200E/MC200 series PLC

Model	Speci cation	Dimensions(mm) LxWxH
MC200-CPM	CANopen master communication module	58x90x82
MC200-CAN	CAN communication module	
MC200-RS485	RS485 communication module	
MC200-WEN	Ethernet communication module	

T




T



MQT Series Temperature Controller

modules flexibly and integrating internal intelligent PID algorithm; it has the advantages of cascade, high precision,

- Fge f npcagqgm l 8
- Fge f ncpdmp k_l ac8
- Qrpm l e ds l argm l 8
- Qg k njc g l qr_jj_rgm l 8
- Am k njcrc k mbsjc8

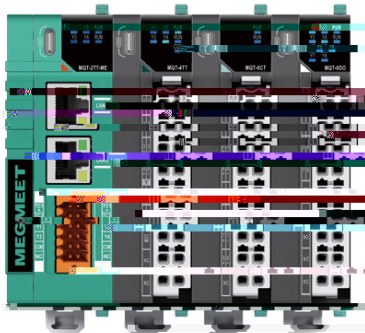

term	eri f n	
PV u ly	~ 0.1%~0.0%	
ignal in ut	n uty	h f m u l e , F A A d r all hann d
		h f m al r e i t a n e P d 00. P d 00. u 100. A 1.0 d r all hann d
	P r e i i n	h f m u l e 0.1 % d ull al e l m a i n
		h f m al r e i t a n e 0. % d ull al e
	am l i n g y l e	~ m / hann d , 100m / 8 hann d , 100m / hann d
e n t l ut ut	ut u f r m	ran i t r ut ut (A r i e ut u t , r e j u t u t u r r a t ut u t u l e e ut ut
	e n t l a f n	A n u a l , A Y , i n g e P , h a i n g & l i n e P , i f n r r i n a l P
Alarm ut ut	Alarm f r m	1 alarm , u h a u f a n l V e l i m i t a l a r m , a i a i n a l a r m a n .
	ut u f r m	ran i t r a n r e j u t ut ut (ut ut t a t a n e i r e t y n t l l e y V r i n g r e j t e)
	ut u t h a n n d	8 h a n n d
i g i t a l i n ut	n u f r m	ran i t r i n ut
	n u t h a n n d	h a n n d
e n t l y l e	0.1 - 10 r 1 - 100	
A u i i f n h a n n d	h a n n d a n 8 h a n n d	
l a f n	F i t e e n V e f a n m m u n i a f n , V e f a n h a n n d , m m u n i a f n a n h a n n d , h a n n d a n h a n n d	
e m m u n i a f n r t	A 8 / M u - P / P / F t h e A / P r f i n e t	
e n e f a l	A m i e t t e n e f a t u e	A r k i n g ~ 0 ~ 0 ° , t r a e e - 0 ~ 0 °
	A m i e t h u m i i y	A r k i n g 10 ~ 90 % A H (n n a f n) , k e e i n g ~ 5 % A H (n n a f n)
	A l i t u	d V ~ 000m
	P r t e i n l e e t	P 20
e &	e r f r m t F / F A 1 ~ - 1 d r u a i n i n u t i a l l a f n ; F	

K m b c j	? a o s g q g r g m l a f _ l l c j	R c k n c p _ r s p c a m l r p m j m s r n s r	? j _ p k m s r n s r	l n s r r w n c
M ~ - M E	~ - H	M u P / P / F t h e n e t	ran i t r (- H)	e
M ~ - M E	~ - H	M u P / P / F t h e n e t	ran i t r (- H)	A
M ~ - F	~ - H	F t h e A A d	ran i t r (- H)	e
M ~ - F	~ - H	F t h e A A d	ran i t r (- H)	A
M ~ - A	~ - H	M u A 8	ran i t r (- H)	e
M ~ - A	~ - H	M u A 8	ran i t r (- H)	A
M ~ - P A	~ - H	P r f i n e t	ran i t r (- H)	e
M ~ - P A	~ - H	P r f i n e t	ran i t r (- H)	A
R c k n c p _ r s p c a m l r p m j k m b s j c				
M -	- H	M u A 8	ran i t r (- H)	e
M - A	- H	M u A 8	Anal e (- H)	e
M - A	- H	M u A 8	A d a y (- H)	e
M - A	- H	M u A 8	ran i t r (- H)	A
M - A	- H	M u A 8	Anal e (- H)	A
M - A	- H	M u A 8	A d a y (- H)	A
C v n _ l q g m l k m b s j c				
M - 8	8 - H	8 - h a n n d i g i t a l i n ut	-	
M - 8	8 - H	8 - h a n n d i g i t a l ut ut	i g i t a l (8 - H)	
M - 8 e	8 - H	8 - h a n n d u r r a t e e i n	-	
M - 8 M	8 - H	- h a n n d i g i t a l i n ut , - h a n n d i g i t a l ut ut	i g i t a l (- H)	
M - 8 A	8 - H	8 - h a n n d a n a l e u r r a t i n ut	-	
M - 8 A	8 - H	8 - h a n n d a n a l e u l a e i n ut	-	
M - 8 A	8 - H	8 - h a n n d a n a l e ut ut	Anal e (8 - H)	

MTC/MTCW/MTCV series products are multi-channel and high-precision temperature controllers, which are suitable for various occasions of temperature control. Its main feature is compatible with TC and RTD, high measure accuracy; high integration (one module supports up to 12 channels of temperature control and 16 channels of measurement), space saving, easy data exchange, remote monitoring, and high cost performance.

- Bcbga_rcb qmdr u_pc8

Provide special software - MtcCompanion
- Bs_j+N6B ds l argm l 8

Heating&cooling dual-PID control function, 14 alarms like upper and lower limits, deviation, etc
- Fge f npcagqgm l

Intelligent self-tuning and multi-stage temperature setting functions to achieve high-precision temperature control
- Ksjrg+u _w am l rpmj

Integrated multi-channel temperature control to centralize data management
- C_qw cva f _lec

Data exchange easily between thermostat and PLC, thermostat and HMI, thermostat and computer through Ethernet and serial port



tem	erifin	
PV u ly	(-1 % ~ 0%	
ignalin ut	n uty	
	Pr i i n	h f m u l
	am ling y l	
	ut u f rm	
n t l ut ut	n t l a i n	
	Alarmf rm	
Alarm ut ut	ut u f rm	
	ut ut hann	
in ut	n u f rm	
	n ut hann	
n t l y l		
A ui i f n hann		
la i n		
m muni a f n r t		
n e f al	Am i n t t e m f a t u r e	
	Am i n t h u m i i y	
	A l i t u	
	Pr t e i n l e d	
&	r f r m t 1 ~ -1 r u a i n i n u t r i a l l a f n u t 1010-1; u t	

MTCE series product, as a multi-channel high-precision EtherCAT temperature controller, are adapted to various mainstream master stations. Its main feature is compatible with thermocouples and thermal resistors, high measurement accuracy, feature-rich, user-friendly. It has the characteristics of high integration, space saving, easy data exchange, remote monitoring, and high cost performance.

Lcrumpiglea_n_agrw

Further A

Ma ura ura y full al f $\pm 0.1\%$ n tr la ura y $\pm 0.2^\circ$

0.1 am ling y l an 1m yn hr niza f n y l a ing l m ul an
fa t e P n tr lan im l d gi fa f n, an m nit ranal g yalu



time	series	
		$\gamma_{\text{series}}(-1\% \sim 20\%)$
	$F_{\text{series}}A$	

Product model




Amatur nrl utut

Alarm u t u t

n u t y 

ran i t r

ran i t r

nature n t l u t u t

Alarm u t u t

n u t y 

Product Feature

Fgef ncpdmp k_lac

0.1 am ling y l

Fge f npcagqgm l

Ma ura ura y full al $\pm 0.1\%$
a a ntr la ura ± 0 .

nam utrumque

```

Prei i n      l      u t e

```

u t₂

	t	r
1	0.000000	0.000000
2	0.000000	0.000000
3	0.000000	0.000000
4	0.000000	0.000000
5	0.000000	0.000000
6	0.000000	0.000000
7	0.000000	0.000000
8	0.000000	0.000000
9	0.000000	0.000000
10	0.000000	0.000000
11	0.000000	0.000000
12	0.000000	0.000000
13	0.000000	0.000000
14	0.000000	0.000000
15	0.000000	0.000000
16	0.000000	0.000000
17	0.000000	0.000000
18	0.000000	0.000000
19	0.000000	0.000000
20	0.000000	0.000000
21	0.000000	0.000000
22	0.000000	0.000000
23	0.000000	0.000000
24	0.000000	0.000000
25	0.000000	0.000000
26	0.000000	0.000000
27	0.000000	0.000000
28	0.000000	0.000000
29	0.000000	0.000000
30	0.000000	0.000000
31	0.000000	0.000000
32	0.000000	0.000000
33	0.000000	0.000000
34	0.000000	0.000000
35	0.000000	0.000000
36	0.000000	0.000000
37	0.000000	0.000000
38	0.000000	0.000000
39	0.000000	0.000000
40	0.000000	0.000000
41	0.000000	0.000000
42	0.000000	0.000000
43	0.000000	0.000000
44	0.000000	0.000000
45	0.000000	0.000000
46	0.000000	0.000000
47	0.000000	0.000000
48	0.000000	0.000000
49	0.000000	0.000000
50	0.000000	0.000000
51	0.000000	0.000000
52	0.000000	0.000000
53	0.000000	0.000000
54	0.000000	0.000000
55	0.000000	0.000000
56	0.000000	0.000000
57	0.000000	0.000000
58	0.000000	0.000000
59	0.000000	0.000000
60	0.000000	0.000000
61	0.000000	0.000000
62	0.000000	0.000000
63	0.000000	0.000000
64	0.000000	0.000000
65	0.000000	0.000000
66	0.000000	0.000000
67	0.000000	0.000000
68	0.000000	0.000000
69	0.000000	0.000000
70	0.000000	0.000000
71	0.000000	0.000000
72	0.000000	0.000000
73	0.000000	0.000000
74	0.000000	0.000000
75	0.000000	0.000000
76	0.000000	0.000000
77	0.000000	0.000000
78	0.000000	0.000000
79	0.000000	0.000000
80	0.000000	0.000000
81	0.000000	0.000000
82	0.000000	0.000000
83	0.000000	0.000000
84	0.000000	0.000000
85	0.000000	0.000000
86	0.000000	0.000000
87	0.000000	0.000000
88	0.000000	0.000000
89	0.000000	0.000000
90	0.000000	0.000000
91	0.000000	0.000000
92	0.000000	0.000000
93	0.000000	0.000000
94	0.000000	0.000000
95	0.000000	

MZ800 Series Human Machine Interface



Picture

Model/Series

Display size



MZ800-TT210SK30W



MZ800-TT215SK31



MZ800-TT07SK31M



MZ800-TT210SK31M



MZ800-TT22P