



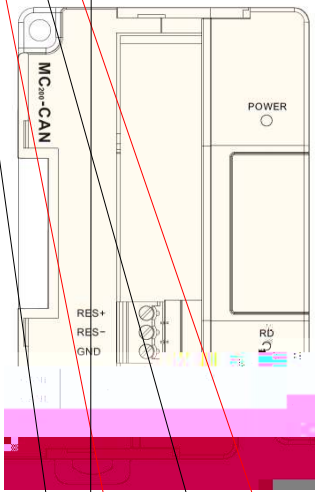


2.

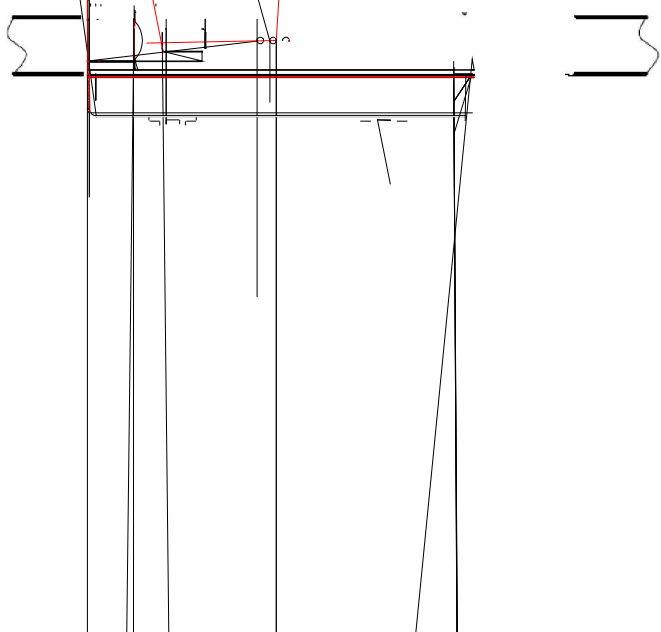

3. 2


3-1

4.

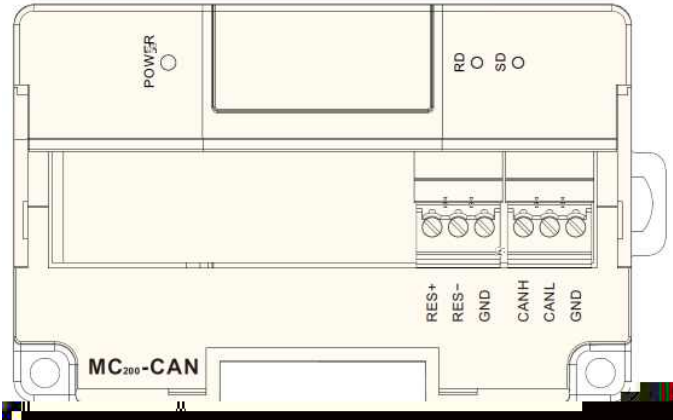


120

RES+ RES-



CAN

CAN



CANBUS通信模块配置

通信参数

CAN口帧类型设置: CAN2.0B

指定ID滤波是否有效: 否 * 是

CAN口通讯波特率: 250 k

接收滤波掩码(4Bytes): 0

传输协议类型: 协议传输

模块站号: 2

配置缓冲区首地址(占用1000): D 4000

接收CAN数据帧ID是否打包到串口数据包中? 否 * 是

接收数据区

接收帧ID: 0x04000000 长度: 4 帧数据长度: 32

00000000 00000000 00000000 00000000

00000000 00000000 00000000 00000000

00000000 00000000 00000000 00000000

00000000 00000000 00000000 00000000

接收帧ID: 0x04000000 长度: 4 帧数据长度: 32

00000000 00000000 00000000 00000000

00000000 00000000 00000000 00000000

00000000 00000000 00000000 00000000

00000000 00000000 00000000 00000000

结束

取消

